


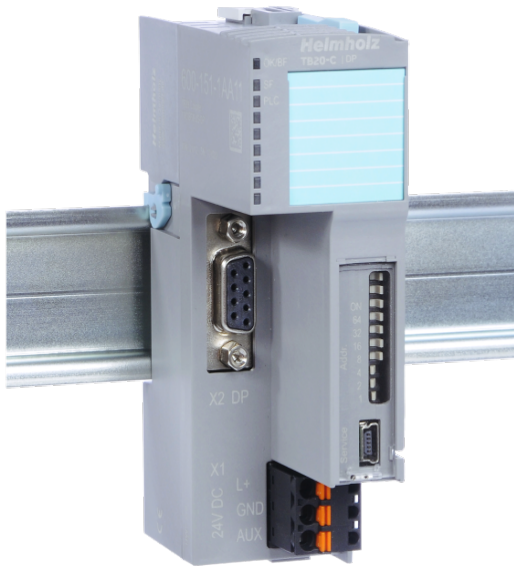

Features

- ✓ Modules can be replaced during operation (hot-swapping)
- ✓ 24 VDC power supply
- ✓ Integrated power supply unit for powering peripheral modules (2.5 A)
- ✓ Supplies the system's I/O voltage (24 VDC)
- ✓ USB device port for online diagnostics, configuring parameters, setup, and firmware updates with TB20 ToolBox
- ✓ TB20 ToolBox simulation for setting up the I/O system without a higher-level controller in order to test the system's operation (I/O check)
- ✓ PROFIBUS DP slave as defined in EN 50170/IEC 61158
- ✓ Supports all PROFIBUS baud rates
- ✓ DP-V0 and DP-V1 support
- ✓ Up to 64 peripheral modules
- ✓ Up to 244 bytes of input data and 244 bytes of output data
- ✓ One class 1 master connection with 240 bytes of payload data
- ✓ Up to three class 2 master connections with 240 bytes of payload data (as a DP-V1 slave)
- ✓ I&M data
- ✓ 3 LEDs, one of them bi-color
- ✓ Concealed "factory reset" switch for restoring the module to its factory settings

TB20 bus coupler PROFIBUS-DP

A functioning TB20 configuration will always require a bus coupler and at least one peripheral module.

Note: Individual modules cannot be combined with the IO systems of other manufacturers.

The PROFIBUS-DP bus coupler is designed to connect a PROFIBUS bus to TB20 peripheral modules. It supports the DP-V0 and DP-V1 protocols.

It will recognize all connected peripheral modules and assign each module the corresponding inputs/outputs from the process image table.

A functioning TB20 configuration will always require a bus coupler and at least one peripheral module, but can accommodate up to 64 modules of any kind connected in series with the bus coupler. The bus coupler supports hot-swap for replacing modules during operation.

Bit packing:

Starting with firmware version 1.20, the states of 2-bit and 4-bit I/O modules can be packed together in bytes, making it possible to take full advantage of all the space in the process image table.

Parameters

Diagnostic alarm: On | Off

Process alarm: On | Off

Pull/plug alarm: On | Off

Startup when expected/actual configuration differ: On | Off (hot-swaping allowed: Yes | No)

Identifier-related diagnostics: On | Off

Submodule status: On | Off

Channel-related diagnostics: On | Off

Note: Individual modules cannot be combined with the IO systems of other manufacturers.

General information

Order number	600-151-1AA11
Article name	TB20-C, PROFIBUS-DP bus coupler
Scope of delivery	Bus coupler PROFIBUS-DP, 24 V power supply connector, bus cover element, base module
Dimensions (DxWxH)	73 x 35 x 110 mm
Weight	Approx. 115 g
Number of modules that can be connected in series	64
Voltage supply	24 VDC, 18–28 VDC
Power dissipation	Max. 8 W
Permissible cable cross-section	AWG 16 .. 22
Mounting position	Any

PROFIBUS interface

Number	1
Protocol	PROFIBUS DP/V0 & DP/V1
Transmission rate	9.6 Kbaud ... 12 Mbaud, automatic detection
I/O image size	244/244 bytes
Parameter configuration length	244 bytes
Interface	RS485
Connection	9-pin D-sub female connector

USB interface

Number	1
Protocol	Full-speed USB 1.1 device
Connection	Mini-USB
Isolation voltage	1.5 kV

Electrical isolation	Yes
----------------------	-----

Current draw

Current draw without modules (internal)	75 mA
---	-------

Power supply for modules	5 V DC, max 2.5 A
--------------------------	-------------------

Ambient conditions

Ambient temperature	0 °C ... +60 °C
---------------------	-----------------

Transport and storage temperature	-20 °C ... +80 °C
-----------------------------------	-------------------

Relative air humidity	95 % r H without condensation
-----------------------	-------------------------------

Protection rating	IP 20
-------------------	-------

Certifications	CE, UL
----------------	--------

UL

Surrounding Air Temperature	0 °C ... +50 °C
-----------------------------	-----------------

Pollution degree	2
------------------	---

CE

Noise immunity	DIN EN 61000-6-2 "EMC Immunity"
----------------	---------------------------------

Interference emission	DIN EN 61000-6-4 "EMC Emission"
-----------------------	---------------------------------

Vibration and shock resistance	DIN EN 60068-2-6:2008 „Vibration“, DIN EN 60068-2-27:2010 „Shock“
--------------------------------	---

As of: 7 - 2026